



Project \_\_\_\_\_  
Item # \_\_\_\_\_  
Quantity \_\_\_\_\_


## Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

Hatco Glo-Ray® Narrow Strip Heaters are great for use in tight spaces and keep the focus on food items being displayed. Ideal for minimal sight obstruction of food product in heated buffet areas. Even the most delicate dishes hold that "just-prepared" look.

### Standard features

- Sleek, slim design with just 2" (51 mm) height and 4" (102 mm) depth keeps the focus on the food in buffet lines
- Available in widths from 18" to 72" (457-1829 mm)
- Pre-focused heat maintains serving temperatures longer without continuing to cook the food
- Optional remote control enclosure in *Designer* colors†
- Sturdy continuous heavy duty Steel housings available in *Designer* colors: Warm Red, Black (standard), Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper or Stainless Steel
- Accessorize units with non-adjustable tubular stands in *Designer* colors†
- Models come with non-adjustable 1.5" (38 mm) angle brackets available in *Designer* colors†
- An on-off switch and indicator light can be installed in front or back of unit, GRNM models use remote controls only (no built-ins)
- Lower wattage elements also available, please consult factory for more information

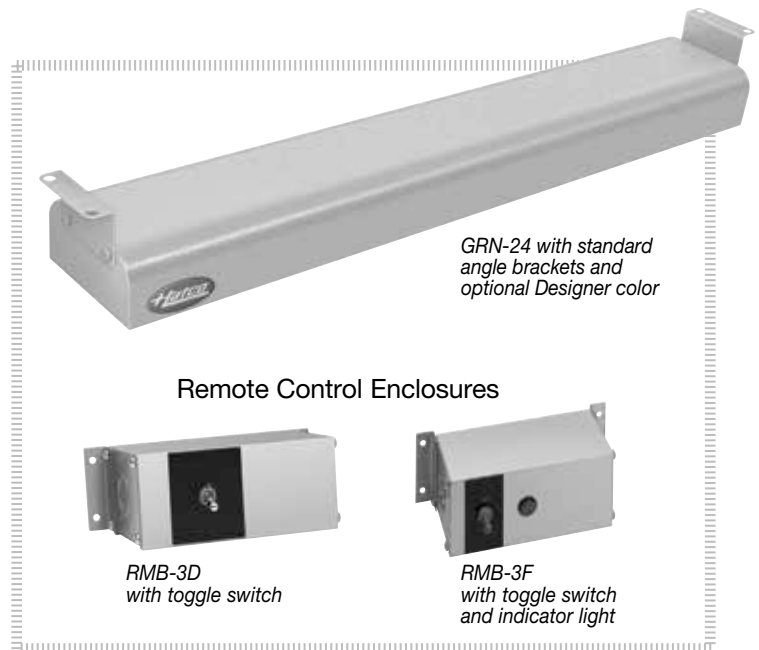

### Options (available at time of purchase only)

- Housing in *Designer* Color† (Black standard)
- |                                       |   |  |                                    |
|---------------------------------------|---|--|------------------------------------|
| <input type="checkbox"/> Warm Red     | <input type="checkbox"/> Gray Granite   | <input type="checkbox"/> White Granite   | <input type="checkbox"/> Navy Blue |
| <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper | <input type="checkbox"/> Stainless Steel |                                    |
- Power Leads – Standard 6" (152 mm) – must specify lead length
- |   |   |
|---|---|
| <input type="checkbox"/> 1'-5' (305-1525 mm)    | <input type="checkbox"/> 6'-10' (1829-3048 mm)  |
| <input type="checkbox"/> 11'-15' (3352-4572 mm) | <input type="checkbox"/> 16'-20' (4877-6096 mm) |
- Remote Box – in *Designer* Color† (Clear Anodized standard)
- |                                    |                                       |   |  |
|------------------------------------|---------------------------------------|---|--|
| <input type="checkbox"/> Warm Red  | <input type="checkbox"/> Black        | <input type="checkbox"/> Gray Granite   | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper |  |
- ☐ Stainless Steel Hanger tabs in lieu of angle brackets (GRN, GRNH only)
- ☐ Attached 6' (1829 mm) Cord and Plug Set (120V GRN and GRNH only) on models up to 72" (1829 mm) wide with Standard Chain Mount Kit (two S hooks with two 6" (152 mm) lengths of chain) and hanger tabs (max.1800 watt)
- ☐ Adjustable Tubular Stands 10"-14" (254-356 mm)
- Non-Adjustable Tubular Stands – choose clearance
- |                                       |                                       |                                       |                                       |
|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| <input type="checkbox"/> 10" (254 mm) | <input type="checkbox"/> 12" (305 mm) | <input type="checkbox"/> 14" (356 mm) | <input type="checkbox"/> 16" (406 mm) |
|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
- Designer* Color for Tubular Stands† (Clear Anodized standard)
- |                                    |                                       |   |  |
|------------------------------------|---------------------------------------|---|--|
| <input type="checkbox"/> Warm Red  | <input type="checkbox"/> Black        | <input type="checkbox"/> Gray Granite   | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper |  |
- ☐ Indicator light

†Non-standard colors are non-returnable



**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)




# Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## GRN, GRNH, GRNM

GRNM units use  
remote controls only  
(no built-ins)



## SPECIFICATIONS - Glo-Ray® Narrow Infrared Strip Heaters

Phase: Single

The shaded areas contain electrical  
information for International models

Standard Watt				High Watt				Max Watt				All Models		
Model	Volts	Watts	Amps	Model	Volts	Watts	Amps	Model <sup>○</sup>	Volts	Watts	Amps	Dimensions W x D x H	Plug GRN, GRNH only	Ship Weight*
GRN-18	120		2.1	GRNH-18	120		2.9	GRNM-18	120		3.8	18" x 4" x 2" (457 x 102 x 51 mm)	NEMA 5-15P	6 lbs. (3 kg.)
	208	250	1.2		208	350	1.7		208	450	2.2		-	
	240		1.0		240		1.5		240		1.9		-	
	220	250	1.1		220	350	1.6		220	-	-		-	
	240		1.0		240		1.5		240	-	-		-	
	220-230 (CE)*	250-273	1.1-1.2		220-230 (CE)*	350-383	1.6-1.7		220-230	-	-		-	
	230-240 (CE)*	230-250	1.0-1.0		230-240 (CE)*	321-350	1.4-1.5		230-240	-	-		-	
GRN-24	120		2.9	GRNH-24	120		4.2	GRNM-24	120		5.4	24" x 4" x 2" (610 x 102 x 51 mm)	NEMA 5-15P	7 lbs. (3 kg.)
	208	350	1.7		208	500	2.4		208	650	3.1		-	
	240		1.5		240		2.1		240		2.7		-	
	220	350	1.6		220	500	2.3		220	-	-		-	
	240		1.5		240		2.1		240	-	-		-	
	220-230 (CE)*	350-383	1.6-1.7		220-230 (CE)*	500-547	2.3-2.4		220-230	-	-		-	
	230-240 (CE)*	321-350	1.4-1.5		230-240 (CE)*	459-500	2.0-2.1		230-240	-	-		-	
GRN-30	120		3.8	GRNH-30	120		5.5	GRNM-30	120		6.9	30" x 4" x 2" (762 x 102 x 51 mm)	NEMA 5-15P	8 lbs. (4 kg.)
	208	450	2.2		208	660	3.2		208	825	4.0		-	
	240		1.9		240		2.8		240		3.4		-	
	220	450	2.1		220	660	3.0		220	-	-		-	
	240		1.9		240		2.8		240	-	-		-	
	220-230 (CE)*	450-492	2.1-2.2		220-230 (CE)*	660-721	3.0-3.1		220-230	-	-		-	
	230-240 (CE)*	413-450	1.8-1.9		230-240 (CE)*	606-660	2.6-2.8		230-240	-	-		-	
GRN-36	120		4.8	GRNH-36	120		6.7	GRNM-36	120		8.3	36" x 4" x 2" (914 x 102 x 51 mm)	NEMA 5-15P	9 lbs. (4 kg.)
	208	575	2.8		208	800	3.8		208	1000	4.8		-	
	240		2.4		240		3.3		240		4.2		-	
	220	575	2.6		220	800	3.6		220	-	-		-	
	240		2.4		240		3.3		240	-	-		-	
	220-230 (CE)*	575-629	2.6-2.7		220-230 (CE)*	800-875	3.6-3.8		220-230	-	-		-	
	230-240 (CE)*	528-575	2.3-2.4		230-240 (CE)*	735-800	3.2-3.3		230-240	-	-		-	
GRN-42	120		5.6	GRNH-42	120		7.9	GRNM-42	120		9.8	42" x 4" x 2" (1067 x 102 x 51 mm)	NEMA 5-15P	10 lbs. (5 kg.)
	208	675	3.2		208	950	4.7		208	1175	5.6		-	
	240		2.8		240		4.0		240		4.9		-	
	220	675	3.1		220	950	4.3		220	-	-		-	
	240		2.8		240		4.0		240	-	-		-	
	220-230 (CE)*	675-738	3.1-3.2		220-230 (CE)*	950-1038	4.3-4.5		220-230	-	-		-	
	230-240 (CE)*	620-675	2.7-2.8		230-240 (CE)*	873-950	3.8-4.0		230-240	-	-		-	
GRN-48	120		6.7	GRNH-48	120		9.2	GRNM-48	120		10.8	48" x 4" x 2" (1219 x 102 x 51 mm)	NEMA 5-15P	11 lbs. (5 kg.)
	208	800	3.8		208	1100	5.3		208	1300	6.3		-	
	240		3.3		240		4.6		240		5.4		-	
	220	800	3.6		220	1100	5.0		220	-	-		-	
	240		3.3		240		4.6		240	-	-		-	
	220-230 (CE)*	800-874	3.6-3.8		220-230 (CE)*	1100-1202	5.0-5.2		220-230	-	-		-	
	230-240 (CE)*	735-800	3.2-3.3		230-240 (CE)*	1010-1100	4.4-4.6		230-240	-	-		-	
GRN-54	120		7.7	GRNH-54	120		10.4	GRNM-54	120 <sup>‡</sup>		12.5	54" x 4" x 2" (1372 x 102 x 51 mm)	NEMA 5-15P	13 lbs. (6 kg.)
	208	925	4.4		208	1250	6.0		208	1500	7.2		-	
	240		3.9		240		5.2		240		6.3		-	
	220	925	4.2		220	1250	5.7		220	-	-		-	
	240		3.9		240		5.2		240	-	-		-	
	220-230 (CE)*	925-1011	4.2-4.4		220-230 (CE)*	1250-1366	5.7-5.9		220-230	-	-		-	
	230-240 (CE)*	850-925	3.7-3.9		230-240 (CE)*	1148-1250	5.0-5.2		230-240	-	-		-	
GRN-60	120		8.8	GRNH-60	120		11.7	GRNM-60	120 <sup>‡</sup>		14.2	60" x 4" x 2" (1524 x 102 x 51 mm)	NEMA 5-15P	14 lbs. (6 kg.)
	208	1050	5.0		208	1400	6.7		208	1700	8.2		-	
	240		4.4		240		5.8		240		7.1		-	
	220	1050	4.8		220	1400	6.4		220	-	-		-	
	240		4.4		240		5.8		240	-	-		-	
	220-230 (CE)*	1050-1148	4.8-5.0		220-230 (CE)*	1400-1530	6.4-6.7		220-230	-	-		-	
	230-240 (CE)*	964-1050	4.2-4.4		230-240 (CE)*	1286-1400	5.6-5.8		230-240	-	-		-	

<sup>○</sup> All GRNM units must use Remote Controls (no Built-Ins), cord & plug not available.

\* Shipping weight includes packaging and does not include RMB.

\* CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.

<sup>‡</sup> Units not available with Infinite Switch in 120V. RMB2-1R or RMB2-2R series remote control box required.

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)



# Glo-Ray® Narrow Infrared Strip Heaters

Models: GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

GRNM-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

## SPECIFICATIONS - Glo-Ray® Narrow Infrared Strip Heaters

Phase: Single

The shaded areas contain electrical information for international models

Standard Watt				High Watt				Max Watt				All Models		
Model	Volts	Watts	Amps	Model	Volts	Watts	Amps	Model <sup>○</sup>	Volts	Watts	Amps	Dimensions W x D x H	Plug GRN, GRNH only	Ship Weight*
GRN-66	120	1160	9.7	GRNH-66	120 †	1560	13.0	GRNM-66	120 †	1875	15.6	66" x 4" x 2" (1676 x 102 x 51 mm)	NEMA 5-15P▶	16 lbs. (7 kg.)
	208		5.6		208		7.5		208		9.0		-	
	240		4.8		240		6.5		240		7.8		-	
	220	1160	5.3		220	1560	7.1		220	-	-		-	
	240		4.8		240		6.5		240		-		-	
	220-230 (CE)*		5.3-5.5		220-230 (CE)*		7.1-7.4		220-230		-		-	
	230-240 (CE)*	1066-1160	4.6-4.8		230-240 (CE)*	1433-1560	6.2-6.5		230-240		-		-	
GRN-72	120	1275	10.6	GRNH-72	120 †	1725	14.4	GRNM-72	120 †	2075	17.3	72" x 4" x 2" (1829 x 102 x 51 mm)	NEMA 5-15P▶	17 lbs. (8 kg.)
	208		6.1		208		8.3		208		10.0		-	
	240		5.3		240		7.2		240		8.6		-	
	220	1275	5.8		220	1725	7.8		220	-	-		-	
	240		5.3		240		7.2		240		-		-	
	220-230 (CE)*		5.8-6.1		220-230 (CE)*	1725-1886	7.8-8.2		220-230		-		-	
	230-240 (CE)*	1171-1275	5.1-5.3		230-240 (CE)*	1584-1725	6.9-7.2		230-240		-		-	

○ All GRNM units must use Remote Controls (no Built-Ins), and not available with cord and plug.

\* Shipping weight includes packaging and does not include RMB.

† Units not available with Infinite Switch in 120V. RMB2-1R or RMB2-2R series remote control box required.

♦ CE approved units for 220-230V utilize a 220V heating system; 230-240V CE units utilize a 240V heating system.

▶ GRNH-66 and GRNH-72 require NEMA 5-20P cord for Canada.

### TOGGLE SWITCH

Toggle Switch: Max. 15 amps

Location: Chef's left side standard, other options available

GRNM units use remote control enclosures only (no built-ins)

### INFINITE SWITCH


Max. 12.2 amps

### LEADS

6" (152 mm) leads (on server's right)

### PLUG CONFIGURATIONS

Please refer to electrical specifications shown in charts.



### REMOTE CONTROL ENCLOSURES

RMB series uses one Control Box per Strip Heater - If RMB2 series is used, multiple warmers can be controlled from one box (U.S., Canada only). CE models require any remote switches be contained in a Remote Control Enclosure. For more details, see "Choose Remote Box" under "Resources" on Hatco website, or consult Price List.

Model	Volts	Width	Infinite/Toggle Switches U.S., Canada, Export U.S. Dollar
RMB-3A	120	5.5" (140 mm)	1 infinite
RMB-3B	208	5.5" (140 mm)	1 infinite
RMB-3C	240	5.5" (140 mm)	1 infinite
RMB-3D	120, 208, 240	5.5" (140 mm)	1 toggle
RMB-3F	120	5.5" (140 mm)	1 toggle, 1 indicator light
RMB-3G	208	5.5" (140 mm)	1 toggle, 1 indicator light
RMB-3H	240	5.5" (140 mm)	1 toggle, 1 indicator light
RMB-7F	120	9" (229 mm)	1 infinite, 1 indicator light
RMB-7G	208	9" (229 mm)	1 infinite, 1 indicator light
RMB-7H	240	9" (229 mm)	1 infinite, 1 indicator light
RMB2-1R	120, 208, 240	11" (280 mm)	1 toggle, 1 electronic infinite
RMB2-2R	120, 208, 240	14" (356 mm)	1 toggle, 1 electronic infinite

### PRODUCT SPECS - Infrared Strip Heater

The Narrow Infrared Strip Heater shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be a Glo-Ray Model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of Stainless Steel or Designer painted housing and include as standard equipment non-adjustable 1.5" (38 mm) angle brackets.

### RECOMMENDED MOUNTING HEIGHTS

(For diagrams, refer to the Product Installation Manual on the Hatco website)

#### GRN, GRNH

Standard Watt: 8"-11" (203-279 mm) High Watt: 11"-14" (279-356 mm)

#### GRNM

Max Watt: 14"-18" (356-457 mm)

### MINIMUM CLEARANCES

#### GRN, GRNH

##### Combustibles

Unit to surface below: 11" (279 mm)

Unit to back wall: 2" (51 mm)

Below oversheaf: 1" (25 mm) clearance

##### Non-Combustibles

##### Corded Units with Built-In Switches:

Must be installed in a pass through area, not allowed with back wall installation

Unit to surface below: 7" (178 mm)

Unit to back wall: 2" (51 mm)

Below oversheaf: 3" (76 mm) clearance

##### Hardwired Units with Built-In Switches:

Must be installed in a pass through area, not allowed with back wall installation

With Infinite Control or Indicator Light

Unit to surface below: 10" (254 mm)

Below oversheaf: 1" (25 mm) clearance

With On/Off Toggle Switch

Unit to surface below: 8" (203 mm)

Below oversheaf: 1" (25 mm) clearance

##### Hardwired Units with Remote Switches:

Unit to surface below: 8" (203 mm)

Unit to wall: 0" (0 mm)

Below oversheaf: 0" (0 mm) clearance

#### GRNM

##### Combustibles

Must be installed in non-combustible surroundings only

##### Non-Combustibles

Unit to surface below: 12" (305 mm)

Unit to wall: 3" (76 mm)

Below oversheaf: 1" (24 mm) clearance

Set back 10" (254 mm) maximum from front of an oversheaf

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include choice of Stainless Steel or Designer color, extended electrical leads, remote control box, and non-adjustable tubular stands.

Comes with 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com