



Project _____
Item # _____
Quantity _____

Built-In Drawer Warmers - Standard and Narrow

Models: HDW-1B, -2B, -3B
HDW-1BN, -2BN, -3BN

Hold everything from meat to vegetables to rolls in the Hatco Built-In Drawer Warmer. Each drawer features adjustable sliding vents and individual thermostatic controls to hold a wide variety of hot foods safely for peak serving periods.

Standard features

- Available in narrow and standard widths
- Each drawer has a recessed individual thermostatic control, temperature monitor, and On/Off switch
- Heavy-duty drawer slides with nylon rollers
- Adjustable sliding vents on each drawer
- The pan supplied with each drawer lifts straight out of standard width Drawer Warmers - 20.75" x 12.75" x 6" (527 x 324 x 152 mm)
- Completely insulated individual cavities provide maximum energy efficiency
- Unit comes with 4' (1219 mm) flexible conduit



HDW-3B Built-In

Options (available at time of purchase only)

- Designer Drawer Front Colors – Non-standard colors are non-returnable*
- ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite
 - ☐ Navy Blue ☐ Hunter Green ☐ Antique Copper
- ☐ ITC Digital Temperature Control (required on all drawers)
 - ☐ Oversized Drawer Frame and Pan 20" x 15" x 5" (508 x 381 x 127 mm) (Standard width models only)
 - ☐ Biscuit Pan Drawer (Accommodates two 18" x 13" (457 x 330 mm) Half-size Sheet Pans – not included) (Standard width models only)
 - ☐ Chip Guard (HDW-1B, 2B and 3B only)

Accessories

- ☐ Custom trivet raises food product .5" (13 mm) off bottom of full size pan 17.5" x 9.5" x .5" (445 x 242 x 13 mm)
- ☐ Water/Spillage Pan – one per drawer (excludes BIS Drawer and OS-Pan Options)
- ☐ Splash Baffle – one per drawer, Water/Spillage Pan creates humidified environment (excludes BIS Drawer and OS-Pan Options)
- ☐ Stainless Steel Food Pans




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | support@hatcocorp.com



Built-In Drawer Warmers - Standard/Narrow

Models: HDW-1B, -2B, -3B HDW-1BN, -2BN, -3BN

Built-In Drawer Warmer - Standard and Narrow

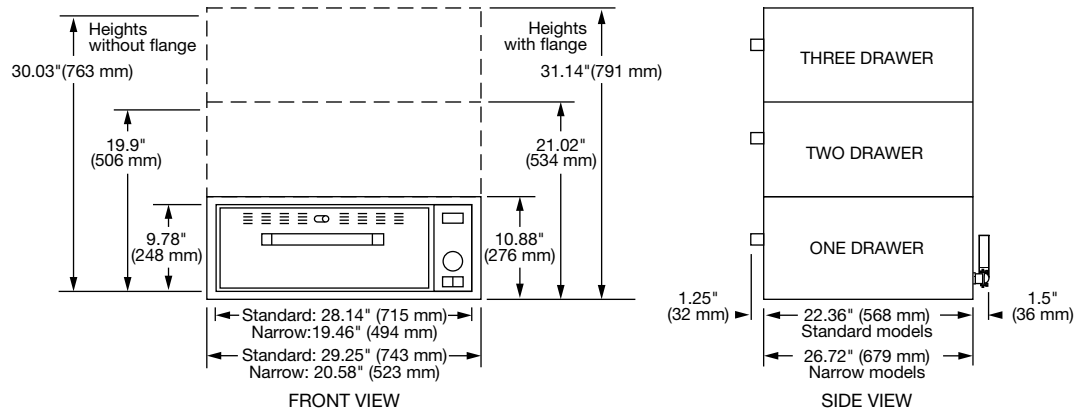

SPECIFICATIONS


Built-In Drawer Warmer - Standard and Narrow

The shaded areas contain electrical information for International models

Model	Dimensions* (Width x Depth x Height)	Volts	Phase	Watts	Amps	Plug	Ship Weight*
HDW-1B HDW-1BN	28.14" x 22.36" x 9.78" (715 x 568 x 248 mm) 19.46" x 26.72" x 9.78" (494 x 679 x 248 mm)	100	Single	450	4.5	Hardwired with conduit	88 lbs. (40 kg)
		120			3.8		
		208			2.2		
		240	Single	450	1.9		
		220			2.0		
		240			1.9		
		220-230 (CE)			450-492	2.0-2.1	
		230-240 (CE)			413-450	1.8-1.9	
HDW-2B HDW-2BN	28.14" x 22.36" x 19.9" (715 x 568 x 506 mm) 19.46" x 26.72" x 19.9" (494 x 679 x 506 mm)	100	Single	900	9.0	Hardwired with conduit	159 lbs. (73 kg)
		120			7.5		
		208			4.3		
		240	Single	900	3.8		
		220			4.1		
		240			3.8		
		220-230 (CE)			900-984	4.1-4.3	
		230-240 (CE)			826-900	3.6-3.8	
HDW-3B HDW-3BN	28.14" x 22.36" x 30.03" (715 x 568 x 763 mm) 19.46" x 26.72" x 30.03" (494 x 679 x 763 mm)	100	Single	1350	13.5	Hardwired with conduit	232 lbs. (106 kg)
		120			11.3		
		208			6.5		
		240	Single	1350	5.6		
		220			6.1		
		240			5.6		
		220-230 (CE)			1350-1476	6.1-6.4	
		230-240 (CE)			1239-1350	5.4-5.6	

*Add 1.14" (29 mm) to width or height for flange. Add 1.25" (32 mm) to depth for drawer handle. *Shipping weight includes packaging.

Locking Strip position for cut-out requirements

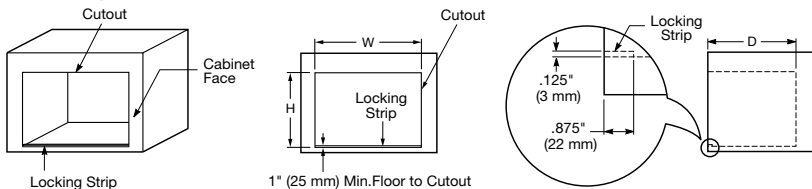

Built-In Cut-Out Requirements

Model	Width	Depth [▲]	Height
HDW-1B	28.375" (720 mm)	24" (610 mm)	10.13" (257 mm)
HDW-2B			20.25" (514 mm)
HDW-3B			30.75" (771 mm)
HDW-1BN	19.7" (500 mm)	28.375" (720 mm)	10.13" (257 mm)
HDW-2BN			20.25" (514 mm)
HDW-3BN			30.75" (771 mm)

▲Depth dimension includes 1.5" (38 mm) for conduit connector.

PRODUCT SPECS

Built-In Drawer Warmer - Standard and Narrow

The Drawer Warmers shall be a Hatco Model ... built-in as manufactured by the Hatco Corporation, Milwaukee, WI 53234, U.S.A.

The unit shall have ... drawer(s) and be rated at ... watts, ... amps. Built-In model with 4' (1219 mm) flexible conduit.

The Drawer Warmer shall have a stainless steel exterior, interior, drawer slides, and

assembly. Drawer rollers shall be durable nylon. The drawer assembly shall fully extend to allow removal of pans without tilting in standard width models.

The unit shall be individually insulated top, bottom and sides of cabinet. Each unit shall have individual power switch, thermostat and temperature monitor for each drawer.

Comes with 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com | intl@hatcocorp.com