

EXPOBAR®



**ESPRESSO / CAPPUCCINO
COFFEE MACHINE**

EXPOBAR®

MEGACREM

mega crem is a range of handsomely designed and very reliable espresso machines. the various models come in many types and range from a basic models to the most advanced machines.



FEATURES

the machines with a display are also equipped with an advanced pid sensor system so that the water always keeps an exact brewing temperature. the temperature is continuously monitored and is rapidly adjusted if it changes. this means that the temperature can be adjusted for the very best espresso experience.



mini control 2 Gr



mini control 1 Gr



mini control 1 Gr
with grinder, black

Group	Power supply	Boiler (litres)	Width mm	Depth mm	Height mm
mini 1 Group	2770W 230V 1n~	6	480	580	520
mini 1 Group with grinder	3125W 230V 1n~	6	480	580	630
mini 2 Groups	2780W 230V 1n~	6	480	580	520
2 Groups	3330W 230V 1n~	11.5	720	580	520
	4780W 400V 3n~				
2 Groups with grinder	3685W 230V 1n~	11.5	720	580	630
3 Groups	4290W 400V 2n~ / 230V 3~	17.5	990	580	520
	6290W 400V 3n~				
4 Groups	4305W 400V 2n~ / 230V 3~	17.5	990	580	520
	6305W 400V 3n~				

MONROC

Monroc is an efficient espresso machine that fulfils all demands for a nice espresso in a simple and easy way. The user-friendly functions of the machine are based on well-trying technology and by skilful and professional craftsman. This means that Monroc is a reliable and solid machine that you can really trust, every day-year after year.

FEATURES

- ③ Built-in volumetric motor pump, complete with two retention valves and solid particle filter
- ③ Copper boiler with heat exchanger per group and pressure relief valve
- ③ Group head with direct pre-infusion chamber
- ③ One steam arm and one hot water tap
- ③ Heating element low water level auto cut-off

CONTROL

- ③ 4 different programmable coffee doses per group
- ③ Auto-fill water boiler
- ③ Automatic back-flush brewing group



Group	Power supply	Boiler (litres)	Width mm	Depth mm	Height mm
2 Groups	2780W 230V IN~	11.5	660	540	480



EXPOBAR®



Mini Control I GR



Mini Control I GR with grinder



Control 2 GR

NEW ELEGANCE

FEATURES

- ③ Built-in volumetric motor pump, complete with two retention valves and solid particle filter
- ③ Copper boiler with heat exchanger per group and pressure relief valve
- ③ Boiler drain tap (except Mini models)
- ③ Group head with direct pre-infusion chamber
- ③ One steam arm and one hot water tap in Mini and 2 group models
- ③ Two steam arms and one hot water tap in 3 & 4 group, Control 2 groups Wood and models with Display

MINI CONTROL


- ③ 4 different programmable coffee doses per group
- ③ Auto-fill water boiler
- ③ Automatic back-flush group head

MINI & 2 GROUPS WITH BUILT-IN GRINDER

- ③ Automatic grinder
- ③ 60 mm diameter cutting blades
- ③ Motor 445W provided with thermic protection, 1300 rpm
- ③ Adjustable dose from 5 to 12 gr

CONTROL

- ③ 4 different programmable coffee doses per group
- ③ Auto-fill water boiler
- ③ Automatic back-flush group head
- ③ Semi-automatic performance

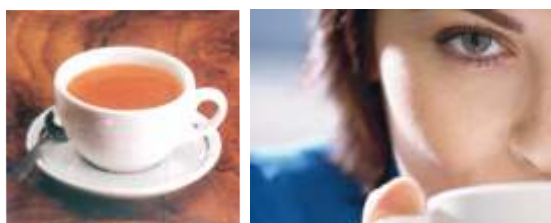

OPTIONAL

- ③ Available in Takeaway design
- ③ Cappuccinatore
- ③ Skimming pipe
- ③ Second steam pipe
- ③ Auto-fill water boiler (Pulser models)
- ③ Double pressure gauge (2 & 3 groups without Display models)
- ③ Machine working with gas (check availability)
- ③ Capsule system: Adjustment of the group head to capsule
- ③ Electrical Heating Plates
- ③ Machine leg set
- ③ Grinder with counter
- ③ Three-phase (2 and 3 groups models)
- ③ Voltage 120V (Mini models)

STANDARD ACCESSORIES

- ③ 1 Single filter handle
- ③ Mini machine, 1 double filter handle
- ③ 2-groups machine, 2 double filter handles
- ③ 3-groups machine, 3 double filter handles
- ③ 4-groups machine, 4 double filter handles
- ③ 0.55 metre connection hose
- ③ 1 cleaning membrane

TECHNICAL SPECIFICATIONS

Group	Power supply	Boiler (litres)	Width mm	Depth mm	Height mm
1-2 Groups Compact/Mini	2500W/230V	6	500	600	510
1 Group Compact/Mini with grinder	2945W/230V	6	500	600	690
2 Groups	3050W/230V	11.5	710	600	510
	4500W/380V 3F+N				
3 Groups with grinder	3495W/230V	11.5	710	600	510
3 and 4 Groups	4000W/380V 2F+N	17.5	990	600	510
	6000W/380V 3F+N				

EXPOBAR®

OFFICE



Office Pulser



Office Control

FEATURES

- ③ Built-in vibration motor pump
- ③ Copper boiler with heat exchanger per group and pressure relief valve professional style
- ③ Group head with direct pre-invasion chamber (Pulser & Control)
- ③ One steam arm and one hot water tap, professional
- ③ Auto-fill water boiler
- ③ Heating element and water pump low water level auto cut-off
- ③ Water softener incorporated
- ③ 2.75 litre water tank

CONTROL

- ③ 4 different programmable coffee doses per group
- ③ Automatic back-flush group head

Group	Power supply	Boiler (litres)	Width mm	Depth mm	Height mm
1 Group Control & Pulser	2065W 230V IN~	1.5	250	420	410

COFFEE GRINDER

TECHNICAL CHARACTERISTICS

Voltage: 230V / 220V / 110V
 Frequency: 50Hz / 60Hz
 Phases: 1(monophase)
 RPM: 1.300 / 1.600
 Current: 1,75A / 3,7A
 Capacitor: 10nf / 40nf
 Power: 0,20Hp / 356W
 Protection rating: IP21
 Motor supplied with thermal protector
 Maximum operating time: 30 min.
 Tempered steel grinding wheel (62HRC) \varnothing 60mm

Lifespan of grinding wheels: 500kg
 Hopper capacity: 2kg
 Doser capacity: 600 g
 Doser regulation: 5/12 g
 Doser lever: right/left
 Stop/start standard version: manual
 Optional: automatic start

Dimensions width x length x height: 210x380x600mm
 Weight: 9kg
 Air noise: 77dB



MITTAL INTERNATIONAL

7, Netaji Subhash Marg, Darya Ganj, New Delhi-110 002

Ph. : 23271810, 23279639, 23278741, 23242500-1-2-3, Fax : 011-23271218

E-mail : mitalin@vsnl.com, sales@mitalin.com, Website : www.mitalin.com