

# salva



## SALVA FRIO FCX-20



The range of retarded proofers SALVA IVERPAN, for trays, is recognized as an indispensable equipment in bakeries and bake offs around the world.

### CHARACTERISTICS

#### ■ Multipurpose

It is easy to install and has the ability to develop retarded or direct fermentation.

#### ■ Optimum air distribution

Provided by the reflectors located in the posterior region of the closet, trying carefully to the most sensitive products.

#### ■ Safety

Door with electromagnetic closure, managed from the control panel with manual safety opening in the outside and inside.

#### ■ Compact and modern design

#### ■ Frontal cooling

This characteristic allows the placing of multiple machines next to each other without the need of leaving an space between them.

#### ■ Control Panel FC-Touch

Equipped with the most advanced software can be adapted to the needs of the user.

#### ■ Condensate collecting tray

Prevents the condensate of the inside of the door from falling to the floor.

## FCX-20 DETAILS AND COMPOSITION


- **Capacity**  
20 trays of 60 x 40 cm or 66 x 46 cm.
- **R134 A fluid refrigerator.**  
Use of refrigerant which does not damage the ozone layer.
- **Working temperature**  
Between -2°C and 40°C to adapt to its different uses.
- **Insulation**  
With a 60 mm thickness on the walls and 40 mm on the floor.

### Technical data FCX-20

kW	V	A	Hz
1.8 (I+N+T)	230	9	50
1.8 (I+N+T)	230	9.5	60

Cooling power/capacity: 1.476 kW or 1.593 kW  
(50 Hz or 60 Hz)

## GENERAL DIMENSIONS

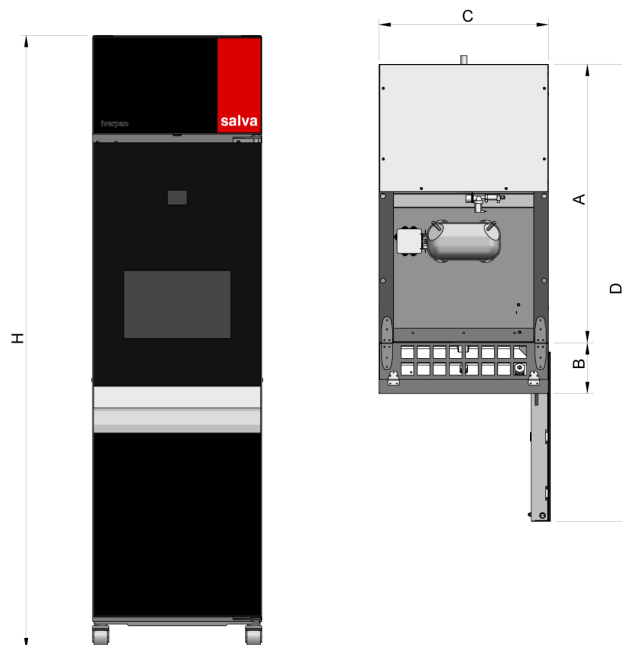

FCX-20	A	B	C	D	H	Weight
	847 mm	180 mm	600 mm	1481 mm	2187 mm	289 kg

## INSTALLATIONS IN DETAIL

- **Water supply**  
Network with maximum pressure intake between 1-1,5 kg/cm<sup>2</sup>. It is necessary to set manual key between the connection of the IVERPAN and the general water supply (rubber tube provided by SALVA).
- **Drainage**  
The drain connection from the IVERPAN to the premises is done by 20 mm diameter rubber tube.
- **Electric power supply**  
The electrical connection should be performed by authorized professionals, following the rules in force in each country.

Location (mm)	X	Y	Z
Water supply (1)	293	472	2073
Drainage (2)	300	0	1858
Electric supply (3)	57.5	934	2170

