



SALVA FRIO FC-SR



The fermentation chamber FC-SR introduces the comfort and advantages of the retarded fermentation in the small bakeries that based its production on the use of racks.

CHARACTERISTICS

- **Multipurpose**
It is easy to install and has the ability to develop retarded or direct fermentation.
- **Optimum air distribution**
Provided by the reflectors located in the posterior region of the cabinet, trying carefully to the most sensitive products.
- **Safety**
Door with electromagnetic closure, managed from the control panel with manual safety opening in the outside and inside.
- **Compact and modern design**
Frontal cooling
This characteristic allows the placing of multiple machines next to each other without the need of leaving an space between them.
- **Control Panel FC-Touch**
Equipped with the most advanced software can be adapted to the needs of the user.

FC-SR DETAILS AND COMPOSITION


- Two capacities are possible:
 - 2 racks of 60 x 40 cm.
 - 1 rack of 80 x 60 cm.
- R134 A fluid refrigerator.
Use of refrigerant which does not damage the ozone layer.
- Working temperature
Between -2°C and 40°C to adapt to its different uses.
- Insulation
With a 60 mm thickness on the walls and 40 mm on the floor.

Technical data FC-SR

kW	V	A	Hz
1.9 (I+N+T)	230	10.3	50
1.9 (I+N+T)	230	10.4	60

Cooling power/capacity: 2.017 kW or 2.021 kW
(50 Hz or 60 Hz)

GENERAL DIMENSIONS

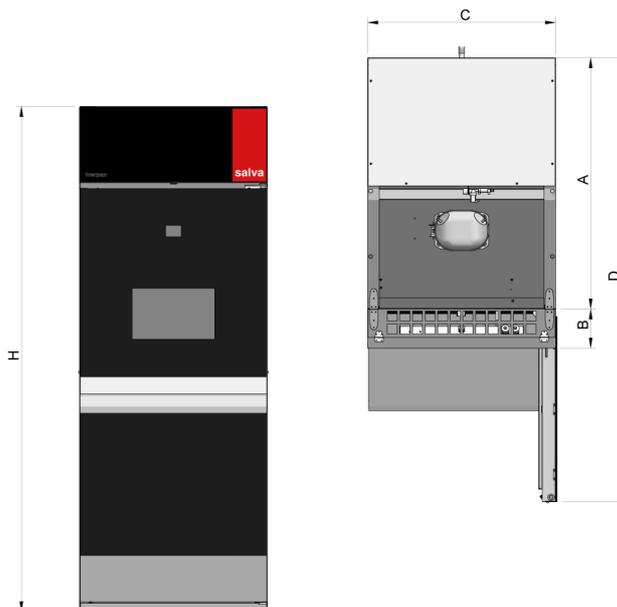

FC-SR	A	B	C	D	H	Weight
	1150 mm	180 mm	850 mm	2035 mm	2315 mm	420 kg

INSTALLATIONS IN DETAIL

- Water supply
Network with maximum pressure intake between 1-1,5 kg/cm². It is necessary to set manual key between the connection of the IVERPAN and the general water supply (rubber tube provided by SALVA).
- Drainage
The drain connection from the IVERPAN to the premises is done by 20 mm diameter rubber tube.
- Electric power supply
The electrical connection should be performed by authorized professionals, following the rules in force in each country.
- Facilities location (mm)

	X	Y	Z
Water supply (1)	418	608	2133
Drainage (2)	425	0	1986
Electrical supply (3)	183	1238	2232

