



Electrolux

Digital Undercounter 3 Door Refrigerated Counter -2+10°C, Full AISI 304

ITEM # _____

MODEL # _____

NAME # _____


SIS # _____

AIA # _____



Electrolux

3 Door Refrigerated Counter -2+10°C, Full AISI 304
Digital Undercounter

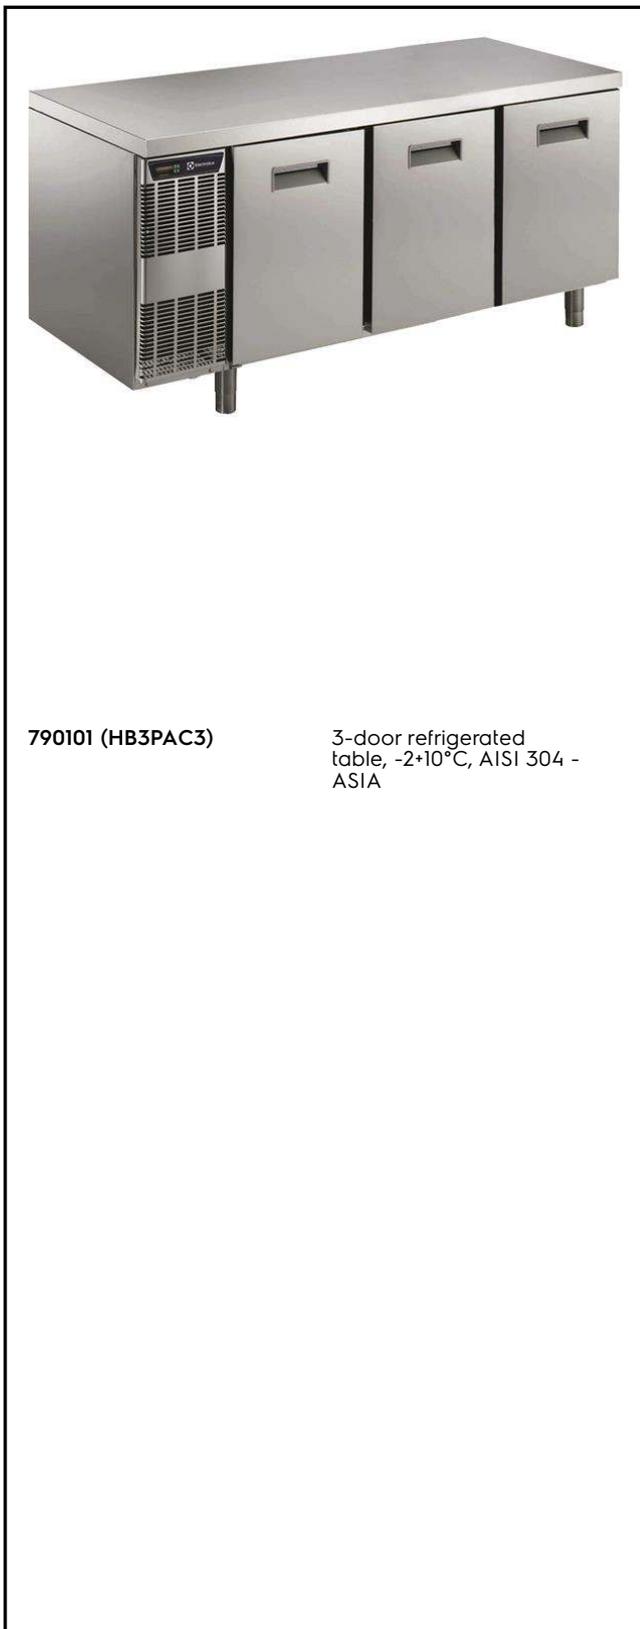

790101 (HB3PAC3)

3-door refrigerated table, -2+10°C, AISI 304 - ASIA

Main Features

- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.

Construction

- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Removable magnetic gasket door with hygienic design.
- Constructed from the highest quality AISI 304 Stainless steel.
- Built-in compressor to suit operating conditions.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Mounted on 150 mm adjustable feet.
- Rounded internal corners for ease of cleaning.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- CFC and HCFC free.

Included Accessories

- 3 of 1x1/1GN PVC grid for counters PNC 880299


Optional Accessories

- Lock kit for counters PNC 880227

APPROVAL: _____



- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
□
- 1x1/1GN PVC grid for counters PNC 880299
□
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
□
- Kit of 2x½ drawers for counters PNC 880305 □
- Kit of 3x½ drawers for counters PNC 880309 □

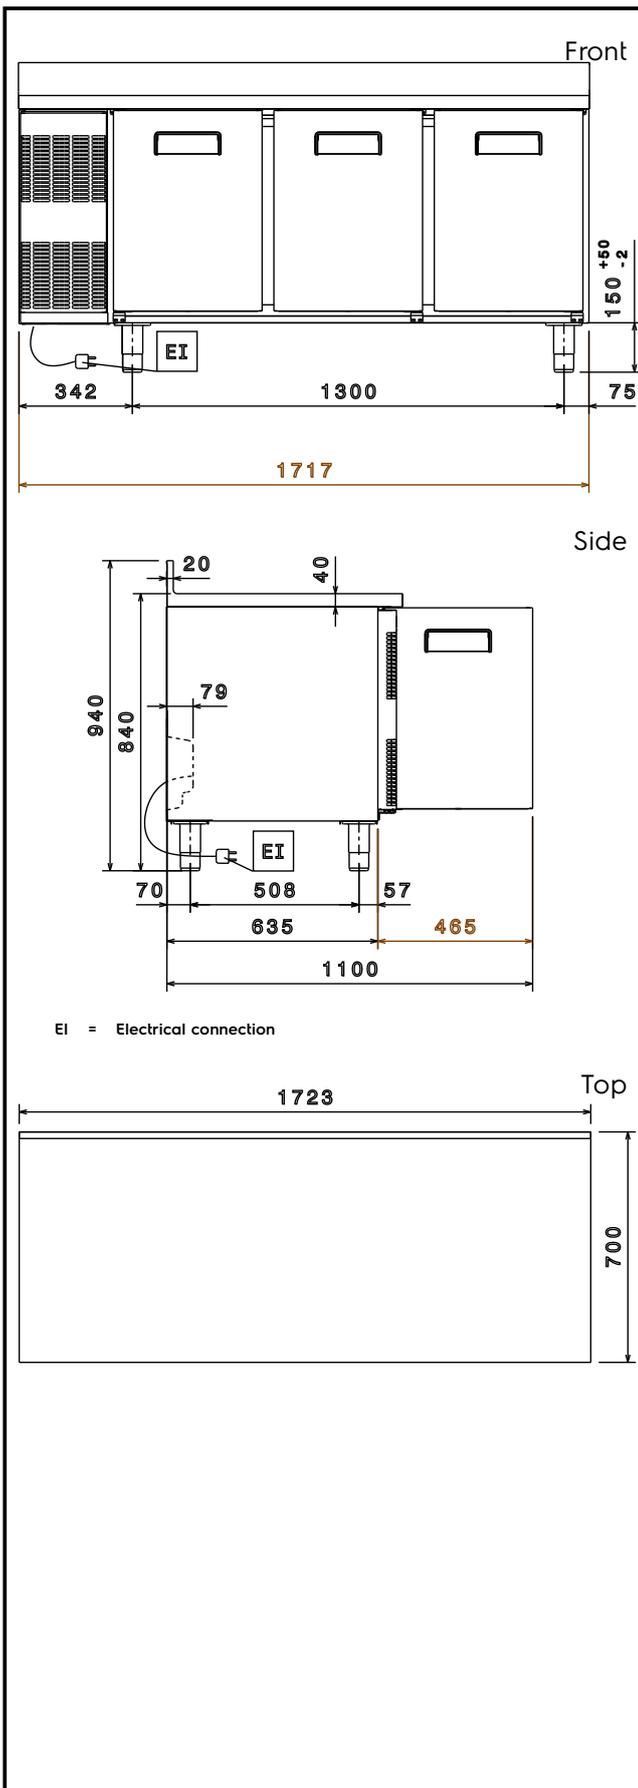

Electric

Supply voltage:

790101 (HB3PAC3) 220-230 V/1N ph/50 Hz

Electrical power, max:

0.35 kW

Key Information:

Gross capacity:	420 lt
Door hinges:	1 Left+2 Right
External dimensions, Width:	1721 mm
External dimensions, Height:	840 mm
External dimensions, Depth:	700 mm
External dimensions, Depth with Doors Open:	1100 mm
Depth with doors open:	1100 mm

Refrigeration Data

Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	877 W
Refrigerant weight:	290 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C