



Electrolux

Digital Cabinets Benefit - 2 Half Doors Digital Freezer - 600 lt

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

Benefit - 2 Half Doors Digital Freezer - 600 lt
Digital Cabinets



Digital Cabinets

Benefit - 2 Half Doors Digital Freezer - 600 lt

790129 (SB600F2D3C)

Benefit Digital 2 Half Door
Freezer - 600 lt - 230
V/1N/50Hz

Short Form Specification

Item No.

Fully constructed in 304 AISI stainless steel. High-density expanded polyurethane insulating foam, 60mm in thickness. Lockable doors with closure latch and microswitch to switch off the fan when the door is opened. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost and evaporation of defrost water; external digital temperature display. Air conveyors allow installation up to 2100 mm from ceiling. For ambient temperatures up to 43 °C. CFC and HCFC free. R404a gas in refrigeration circuit. Mounted on 85 mm feet, adjustable in height up to 125 mm.

Supplied with n. 4x2/1GN nylon coated grids and n. 4 sets of 2 stainless steel grid runners.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Equipped with air conveyors to allow cabinet installation even up to 2100 mm of distance from ceiling.
- The digital control features service and HACCP alarms and can be connected to a remote computer.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Performance guaranteed at ambient temperatures of +43°C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Lockable door with closure latch (lock not included).
- Automatic evaporation of defrost water.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

Construction

- Mounted on 85 mm feet, adjustable in height up to 125 mm.
- Electronic protection against high voltage peaks.
- Coated evaporator to avoid corrosion and to guarantee everlasting operation.
- Easy to clean, reversible self-closing door with balloon profile, magnetic door seal to guarantee perfect closure.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- CFC and HCFC-free insulation.
- Refrigerant type: R404a.
- Built-in compressor to suit operating conditions.
- Stainless steel AISI 304 internal and external panels including back.

Optional Accessories

- Kit of 4 low feet for cabinets PNC 880264
- Kit of 1x2/1GN PVC grids with side runners for 600/1300lt refrigerated cabinets PNC 880297

APPROVAL: _____



Electrolux

**Digital Cabinets
Benefit - 2 Half Doors Digital
Freezer - 600 lt**

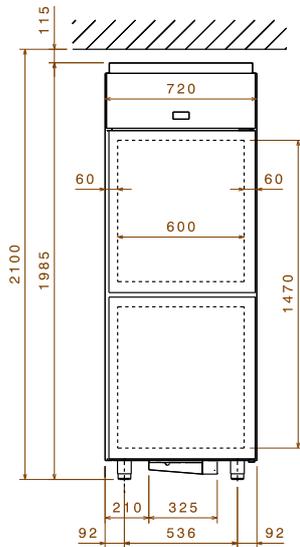
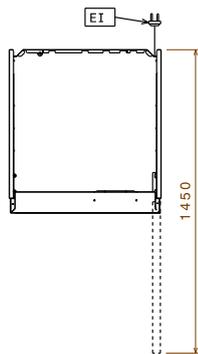
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457



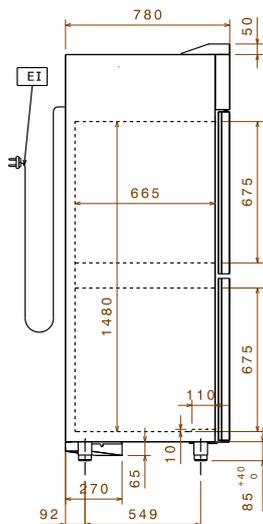
**Digital Cabinets
Benefit - 2 Half Doors Digital Freezer - 600 lt**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2015.04.10

Front

Top


EI = Electrical connection
 RI = Refrigerant Inlet
 RO = Remote unit connection

Side


Electric

Supply voltage:
 790129 (SB600F2D3C) 230 V/1 ph/50 Hz

Key Information:

Door hinges: Right Side
 External dimensions, Height: 1985 mm
 External dimensions, Width: 720 mm
 External dimensions, Depth: 780 mm
 External dimensions, Depth with Doors Open: 1450 mm
 Number and type of doors: 2x1/2Full
 Gross capacity: 600 lt
 Number and type of grids (included): 4 - GN 2/1
 Type of external material: 304 AISI
 Type of internal material: Stainless Steel AISI 304
 Number of positions & pitch: 40; 30 mm

Refrigeration Data

Refrigerant type: R404a
 Operating temperature min.: -22 °C
 Operating temperature max.: -15 °C
 Operating mode: Ventilated
 Cooling unit: Built-In
 Defrost type: Electric