



Electrolux

Digital Cabinets Benefit - 4 Half Doors Digital Refrigerator, 1300 lt

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

Benefit - 4 Half Doors Digital Refrigerator, 1300 lt
Digital Cabinets



Digital Cabinets

Benefit - 4 Half Doors Digital Refrigerator, 1300 lt

790130 (SB130P4D3C)

Benefit Digital 4 Half Door Refrigerator - 1300 lt - 230 V/1N/50Hz

Short Form Specification

Item No. _____

Fully constructed in 304 AISI stainless steel. High-density expanded polyurethane insulating foam, 60mm in thickness. Lockable doors with closure latch and microswitch to switch off the fan when the door is opened. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost and evaporation of defrost water; external digital temperature display. Air conveyors allow installation up to 2100 mm from ceiling. For ambient temperatures up to 43 °C. CFC and HCFC free. R404a gas in refrigeration circuit. Mounted on 85 mm feet, adjustable in height up to 125 mm.

Supplied with n. 8x2/1GN nylon coated grids and n. 8 sets of 2 stainless steel grid runners.

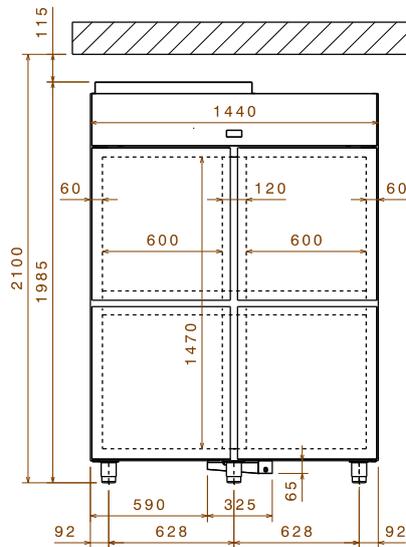
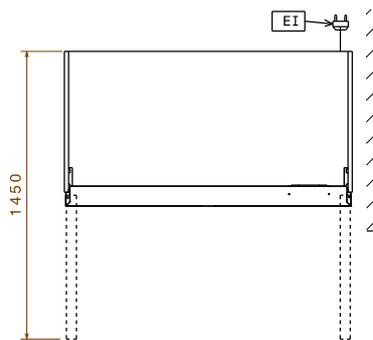
Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Equipped with air conveyors to allow cabinet installation even up to 2100 mm of distance from ceiling.
- The digital control features service and HACCP alarms and can be connected to a remote computer.
- Refrigerator models have operating temperatures that can be adjusted from -2 to 10 °C to suit both meat and dairy storage requirements.
- Performance guaranteed at ambient temperatures of +43°C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Lockable door with closure latch (lock not included).
- Extremely quiet operation at 51 Db(A).
- Automatic evaporation of defrost water.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

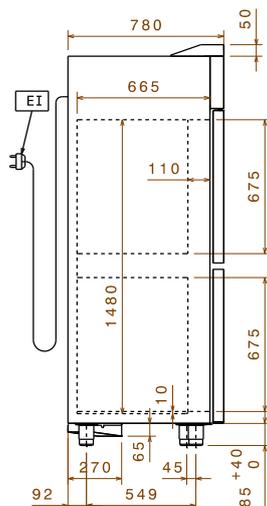
Construction

- Mounted on 85 mm feet, adjustable in height up to 125 mm.
- Electronic protection against high voltage peaks.
- Coated evaporator to avoid corrosion and to guarantee everlasting operation.
- Easy to clean, reversible self-closing door with baloon profile, magnetic door seal to guarantee perfect closure.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- CFC and HCFC-free insulation.
- Built-in compressor to suit operating conditions.
- Refrigerant type: R404a.
- Stainless steel AISI 304 internal and external panels including back.

APPROVAL: _____

Front

Top


EI = Electrical connection
 RI = Refrigerant Inlet
 RO = Remote unit connection

Side

Electric

Supply voltage:
 790130 (SB130P4D3C) 230 V/1 ph/50 Hz

Key Information:

Door hinges: 2 Left+2 Right
 External dimensions, Height: 1985 mm
 External dimensions, Width: 1440 mm
 External dimensions, Depth: 780 mm
 External dimensions, Depth with Doors Open: 1450 mm
 Number and type of doors: 4x1/2Full
 Gross capacity: 1300 lt
 Number and type of grids (included): 8 - GN 2/1
 Type of external material: Stainless Steel AISI 304
 Scotch Brite
 Type of internal material: Stainless Steel AISI 304
 Scotch Brite
 Number of positions & pitch: 80; 30 mm

Refrigeration Data

Compressor power: 1/3 hp
 Refrigerant type: R404a
 Operating temperature min.: -2 °C
 Operating temperature max.: 10 °C
 Operating mode: Ventilated
 Cooling unit: Built-In
 Defrost type: Electric