



# Electrolux

## Digital Cabinets Benefit - 4 Half Doors Digital Freezer - 1300 lt

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Benefit - 4 Half Doors Digital Freezer - 1300 lt  
Digital Cabinets



Digital Cabinets

Benefit - 4 Half Doors Digital Freezer - 1300 lt

790131 (SB130F4D3C)

Benefit Digital 4 Half Door  
Freezer - 1300 lt - 230  
V/1N/50Hz

### Short Form Specification

#### Item No.

Fully constructed in 304 AISI stainless steel. High-density expanded polyurethane insulating foam, 60mm in thickness. Lockable doors with closure latch and microswitch to switch off the fan when the door is opened. Built-in refrigeration unit; ventilated operating mode; digital control; automatic defrost and evaporation of defrost water; external digital temperature display. Air conveyors allow installation up to 2100 mm from ceiling. For ambient temperatures up to 43 °C. CFC and HCFC free. R404a gas in refrigeration circuit. Mounted on 85 mm feet, adjustable in height up to 125 mm.

Supplied with n. 8x2/1GN nylon coated grids and n. 8 sets of 2 stainless steel grid runners.

### Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Equipped with air conveyors to allow cabinet installation even up to 2100 mm of distance from ceiling.
- The digital control features service and HACCP alarms and can be connected to a remote computer.
- Freezer model has operating temperatures that can be adjusted from -22 to -15 °C.
- Performance guaranteed at ambient temperatures of +43°C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Lockable door with closure latch (lock not included).
- Automatic evaporation of defrost water.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

### Construction

- Mounted on 85 mm feet, adjustable in height up to 125 mm.
- Electronic protection against high voltage peaks.
- Coated evaporator to avoid corrosion and to guarantee everlasting operation.
- Easy to clean, reversible self-closing door with baloon profile, magnetic door seal to guarantee perfect closure.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- High density polyurethane insulation, 60 mm tickness, HCFC free.
- CFC and HCFC-free insulation.
- Refrigerant type: R404a.
- Built-in compressor to suit operating conditions.
- Stainless steel AISI 304 internal and external panels including back.

### Optional Accessories

- Kit of 4 low feet for cabinets PNC 880264
- Kit of 1x2/1GN PVC grids with side runners for 600/1300lt refrigerated cabinets PNC 880297

APPROVAL: \_\_\_\_\_



**Electrolux**

**Digital Cabinets  
Benefit - 4 Half Doors Digital  
Freezer - 1300 It**

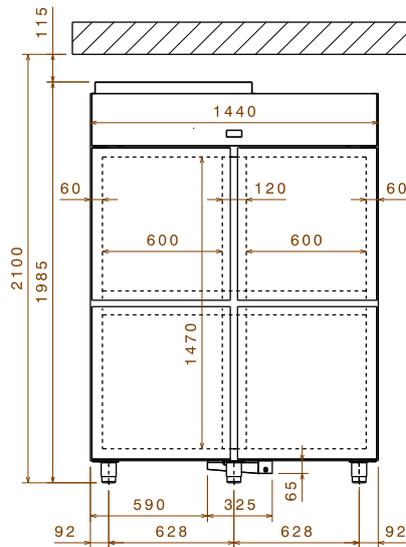
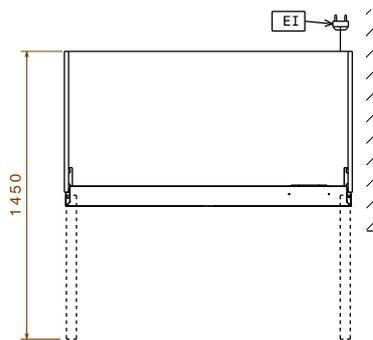
- 4 central PVC grids for 1300lt refrigerated cabinets  PNC 880298
- Kit of 5 wheels (front with brake) for cabinets and counters  PNC 880301
- Printer for HACCP basic version (for cabinets and counters with digital control)  PNC 881457



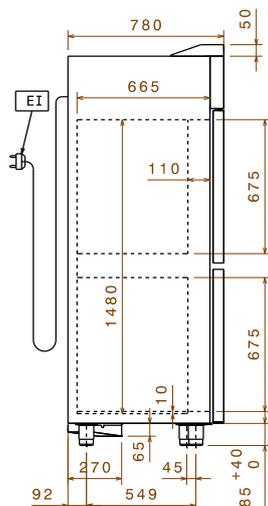
**Digital Cabinets  
Benefit - 4 Half Doors Digital Freezer - 1300 It**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2015.04.10

**Front**

**Top**


EI = Electrical connection  
 RI = Refrigerant Inlet  
 RO = Remote unit connection

**Side**


### Electric

Supply voltage:  
 790131 (SB130F4D3C) 230 V/1 ph/50 Hz

### Key Information:

Door hinges: 1 Left+1 Right  
 External dimensions, Height: 1985 mm  
 External dimensions, Width: 1440 mm  
 External dimensions, Depth: 780 mm  
 External dimensions, Depth with Doors Open: 1450 mm  
 Number and type of doors: 4x1/2Full  
 Gross capacity: 1300 lt  
 Number and type of grids (included): 8 - GN 2/1  
 Type of external material: Stainless Steel AISI 304  
 Scotch Brite  
 Type of internal material: Stainless Steel AISI 304  
 Scotch Brite  
 Number of positions & pitch: 80; 30 mm

### Refrigeration Data

Refrigerant type: R404a  
 Operating temperature min.: -22 °C  
 Operating temperature max.: -15 °C  
 Operating mode: Ventilated  
 Cooling unit: Built-In  
 Defrost type: Electric