



Electrolux

Digital Undercounter 3 Door Freezer Table -22-15°C, Full AISI 304

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Digital Undercounter

3 Door Freezer Table -22-15°C, Full AISI 304

790308 (HB3FAC3)

3-door freezer table, -22-15°C,
AISI 304 - ASIA

Short Form Specification

Item No. _____

The Electrolux range of freezer tables combines the convenience of worktop space with cold storage located below. This versatility allows remarkable savings in space while offering a functional and modular solution to any kitchen requirement. The range comprises of counters with a number of compartments, with built-in compressor unit and remote version, in various door or drawer configurations. The model detailed in this sheet has three compartments, three full doors and operates over the temperature range of -22 °C to -15 °C.

Main Features

- IP65 digital control panel allows for temperature and parameter setting as well as to activate defrosting when necessary.
- Unique airflow design to allow installation against the wall or against other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Suitable for use in ambient temperatures of up to 43 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Self closing and on site reversible left/right doors.
- Door frame heater, activated according to external temperature, avoids condensation build-up around the door frame.

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Fully extractable cooling unit to facilitate maintenance.
- Recessed area in the back to facilitate installation.
- Electronic protection against high voltage peaks.
- Built-in compressor to suit operating conditions.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Mounted on 150 mm adjustable feet.
- Rounded internal corners for ease of cleaning.
- Anti-drip profile on stainless steel worktop edge.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Access to all components from the front.
- CFC and HCFC free.
- Removable magnetic gasket door with hygienic design.

Included Accessories

- 3 of 1x1/1GN PVC grid for counters PNC 880299

Optional Accessories

- Lock kit for counters PNC 880227
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1x1/1GN PVC grid for counters PNC 880299
- Kit of 5 wheels (front with brake) for cabinets and counters PNC 880301
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____



Electrolux

Digital Undercounter 3 Door Freezer Table -22-15°C, Full AISI 304

Electric

Supply voltage:

790308 (HB3FAC3)

220/230 V/1N ph/50 Hz

Electrical power:

0.7 kW

Key Information:

Door hinges:

1 Left+2 Right

External dimensions, Height:

840 mm

External dimensions, Width:

1721 mm

External dimensions, Depth:

710 mm

External dimensions, Depth with Doors Open:

1100 mm

Number and type of doors:

3Full

Gross capacity:

420 lt

Depth with doors open:

1100 mm

Number and type of grids (included):

3 - GN 1/1

Refrigeration Data

Compressor power:

1 hp

Refrigerant type:

R404a

Refrigeration power:

802 W

Refrigerant weight:


230 g

Operating temperature min.:

-22 °C

Operating temperature max.:

-15 °C

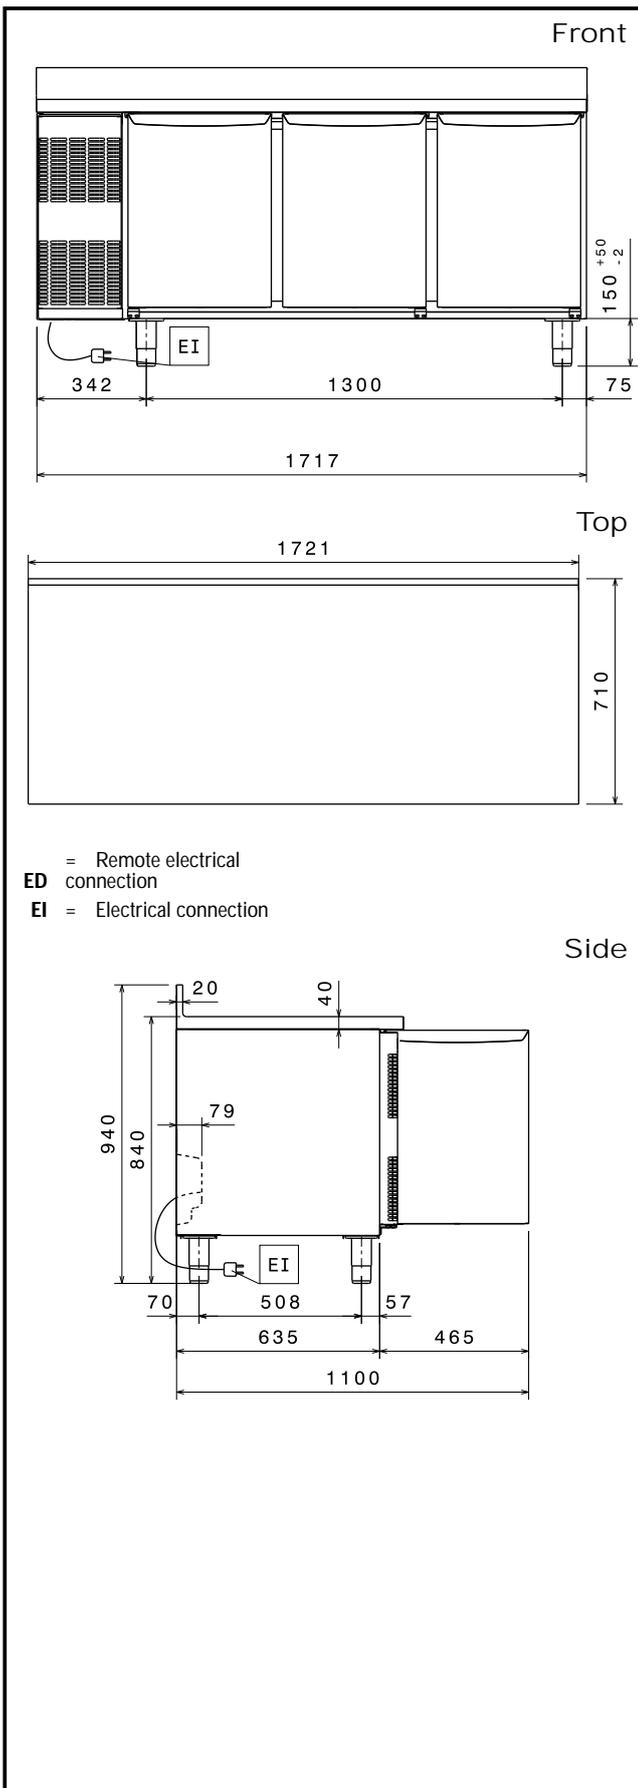

Digital Undercounter
3 Door Freezer Table -22-15°C, Full AISI 304

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

